

The Livhanken

Materials

The Livhanken is made of acid-resistant steel with a UV-resistant yellow (RAL 1016) powder coating. Premium 3M reflexes are attached to each step. The Low and High Handles (optional) are made of acid-resistant stainless steel with a UV-resistant yellow (RAL 1016) powder coating. 2 pieces of 3M premium yellow reflexes are attached to each handle. There are 3 variations of the Livhanken. For mounting suspended under docks, On top of docks (High Handle integrated) or for mounting on Y beams (100x100mm or 100x60mm options, High Handle integrated) The Livhanken is in a horizontal position when not used. Pull the Livhanken downwards when in need, to get it to a vertical, climbing position. Screws for mounting are not included.

Weight and dimensions


Climbing Height: 150 cm
Step width: 20 cm
Step height: 35 cm
The High Handle: 60 x 20 x 8 cm
The Low Handle: 11 x 49 x 10 cm
Weight: Y-Beam 10,5 kg, Others 8,5 kg

Lifespan and Maintenance

The lifespan of The Livhanken depends on where it is placed and how exposed it is to the elements. To increase lifespan, we recommend reviewing The Livhanken every year. If necessary, it can be washed off with water and mild detergent. When The Livhanken is consumed, All metal parts shall be sorted as Metal waste for Recycling.

Additional equipment (not included)

The Low Handle [5610209]
The High Handle [5611015]
Reflex Sign The Livhanken 50 cm [5610224]

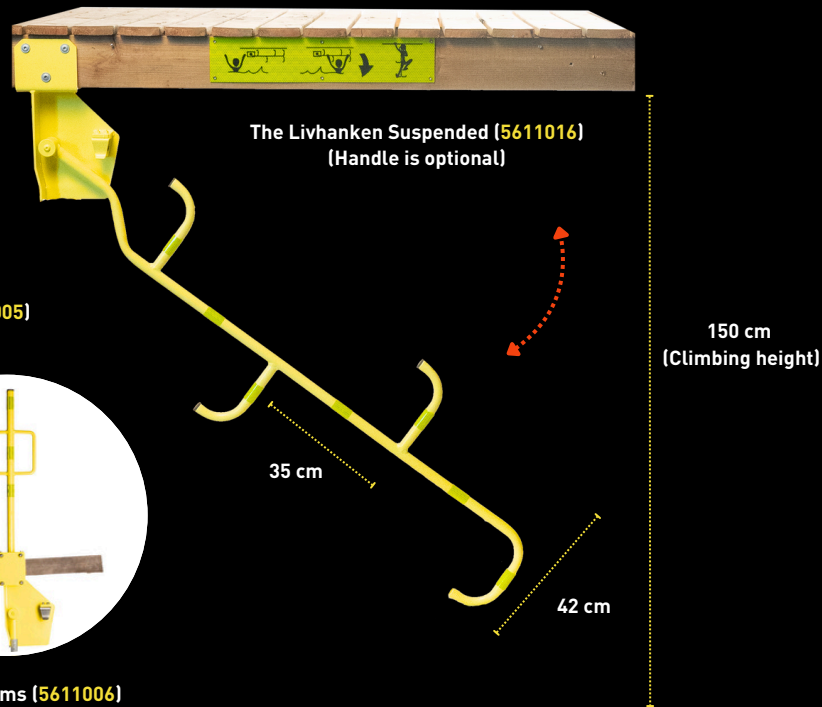

Yellow (Standard)   Custom Powder Coating (Optional)



The Livhanken © Product Specifications Version 1.00.
Copyright © 2024 Fristad Plast AB
www.rescuelifelife247.se

THE INFORMATION AND DESIGNS IN THIS DOCUMENT ARE THE EXCLUSIVE PROPERTY OF FRISTAD PLAST AB. NO PART OF THESE DESIGNS OR THE INFORMATION CONTAINED HEREIN MAY BE REPRODUCED, DISTRIBUTED, OR DISCLOSED WITHOUT THE EXPLICIT WRITTEN PERMISSION OF FRISTAD PLAST AB.

“EVERY YEAR, AT LEAST TEN PEOPLE IN SWEDEN, ARE SAVED BY A LIFEBUOY”